

# TILT AND PUSH PREMIUM STEPS

Large platform  
Width 490 mm  
Depth 600 mm


Knuckle guard  
hand grips

Durable  
grounding  
skids



**Steel Mesh Tread  
with Galvanised Finish**  
Ideal for general use in  
outdoor or wet areas

**GS7806G**



**Steel Mesh Tread**

Ideal for general use in factories,  
warehouses etc.

**GS714P with  
GS710Z**



**Optional Extra:**


**Inward Opening Gate**

To provide step through access to  
vehicles, loading bays etc.

For this option quote  
code number:

**GS700Z (Galvanised)**

**GS710Z (Powder Coated)**

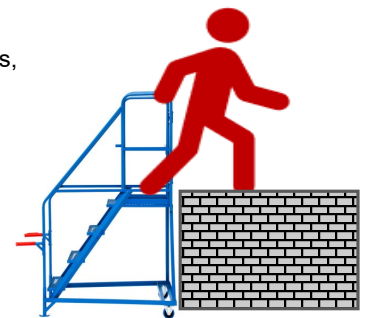

**TILT**



Fitted with 2 rear fixed castors with  
100 mm diameter wheels. Easy to  
wheel into position with a tilt and  
push facility.

**PUSH**

**EN 131  
Certified**

**Platform Capacity:** 150 kg

**Platform Size:** Width 490 x Depth 600 mm

**Tread Size:** Width 490 x Depth 160 mm

**Handrail Height:** 1000 mm

**Description:** Steel frame with expanded mesh treads and platform

**Finish:** High gloss powder coated blue or all weather galvanised option

**Mobile On:** 2 rear fixed castors with 100 mm diameter wheels for tilt and wheel facility

NUMBER OF TREADS	PLATFORM HEIGHT MM	MODEL GALVANISED FINISH	MODEL POWDER COATED FINISH	OVERALL SIZE H X W X D MM	WEIGHT KG
3	750	GS7803G	GS7813P	1750 x 820 x 1235	43
4	1000	GS7804G	GS7814P	2000 x 820 x 1420	48
5	1250	GS7805G	GS7815P	2250 x 1020 x 1605	54
6	1500	GS7806G	GS7816P	2500 x 1120 x 1790	60

**Fort Jason®**

Doc Ref: GS7803 - GS7816

Issue: 1

Date: 27.09.24

Approved: JAP